



VIBE FACILITY COMMITTEE REPORT

March 13, 2024

ADT Commercial Update

Agreement was initiated to start the inspection process for all Fire Systems in order to address any deficiencies and certify all systems including fire alarm, fire extinguishers, sprinkler system, backflow system, and kitchen suppression systems. Systems are checked independently in order to achieve the “Green Tag” Status which certifies the fire systems.

❖ Tag Operational Status:

- Green – Operational (Certification Tag)
- Yellow – Operational with Deficiencies (Partial Impairment)
- Blue – Service the System (Service Tag)
- Red – Inoperable (Impairment Tag)
- White – Installation Tag

❖ Green Tag Status – Certified meaning all systems are working and functioning properly:

- Backflow System – Expires February 2025
- Vent Hood Suppression System – Expires January 2025
- Fire Extinguishers – Expires July 2024

❖ Yellow Tag Status – Deficiencies must be cleared and work completed before a Green Tag status can be issued; there are components with deficiencies which need to be corrected:

- Fire Alarm Panel
- Fire Sprinklers

❖ Deficiencies

- Fire Sprinklers
 - Replace 15 sprinkler heads
 - Install fire hose valve handles
 - Secure 2 hose valve handles
 - Perform FDC hydrostatic tes and flush
 - Perform required backflow test
 - Chain and lock backflow and ball valve
 - Provide 2 pendants and 2 uprights in spare head box
 - Repair Cost: \$3,575.72
- Fire Alarm Panel
 - 2 new errors were found on the fire panel
 1. Power Supply
 - a. Installation of Booster Power Supply
 2. Smoke Detector
 - a. 2nd floor bathroom cooridor needs to be replaced due to expiration date
 - Replacement Cost: \$2,880

HVAC System Update

❖ Deficient Systems

- Rooms 101, 201, 213
 - Room 101 – window unit installed until further assessment can be made
 - Room 201 – needs a T-Pipe installed to separate from room above

- Room 213 – window unit will be installed
- Front Office
 - Repair Cost: \$3,344
 - Replace motor blower
 - Replace air movement wheel
 - Replacement Cost: \$21,470
 - Replace with a 14.2 seer
 - Crane for rooftop system removal and replacement


Emergency Evacuation Procedures

❖ **EVACUATION ZONES**

- **Yellow Zone – LePage Stairwell**
 - **Yellow Zone** – Exit down the LePage Stairwell, take a left at the sidewalk, walk down the sidewalk on LePage Street, at the corner cross over N. White Street and continue down the street to the middle of the block. Do not cross over N. Dupre Street.
- **Blue Zone – N. White Stairwell**
 - **Blue Zone** – Exit down the N. White Stairwell, walk through the courtyard and out the gate, go directly across LePage Street, go left to the corner, turn right on N. White Street and continue down the street to the middle of the block. Do not cross over Grand Route St. John.
- **Green Zone – Crete Stairwell**
 - **Green Zone** – Exit down the Crete Stairwell, walk through the courtyard and out the gate, at the sidewalk turn right and walk down LePage Street to the corner, at the corner turn left at Crete Street, cross over LePage Street and walk down Crete to the middle of the block. Do not cross over Grand Route St. John.

International High School of New Orleans
2733 Esplanade Avenue, New Orleans, LA 70119

Emergency Evacuation Routes

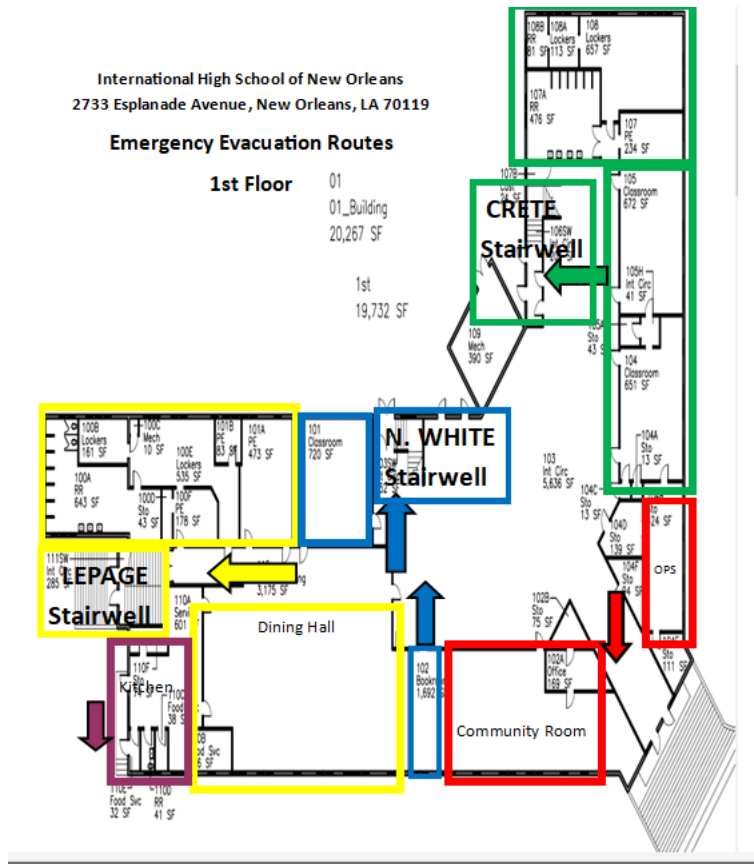

Upcoming Projects

- ❖ Buck Moth Caterpillar Treatment
 - Spraying must be completed in mid-March to late-March
 - Before they migrate to the ground
- ❖ Landscaping Projects
 - Contact SOUL Nola or the NOLA Tree Project to identify programs available to schools to access free trees and landscaping